


# SUSPENSION PRODUCTS

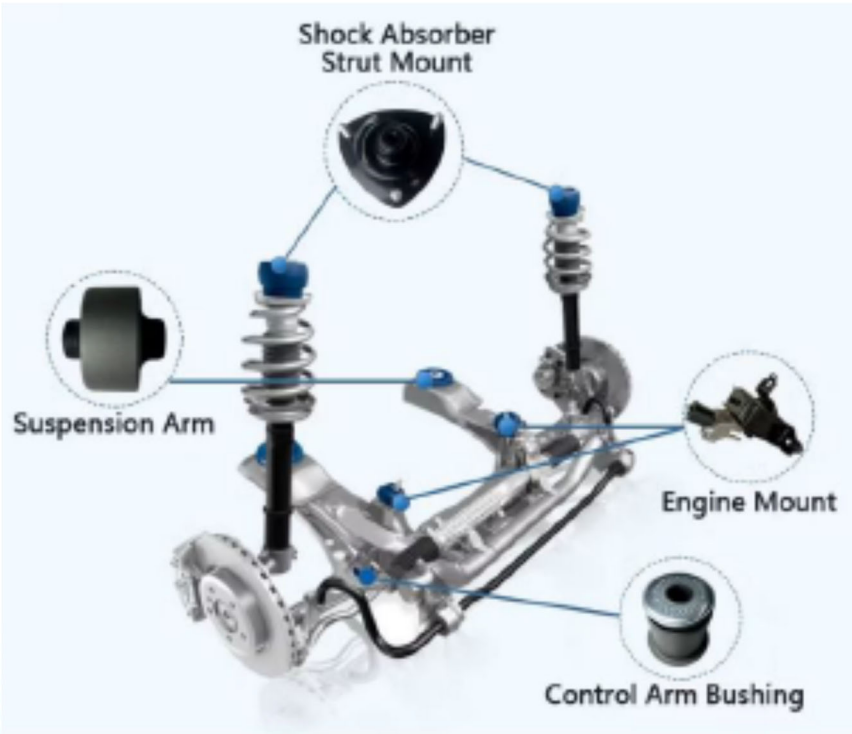

## FEATURES

- Easy to Install
- Durable & High Quality
- Multipurpose Applications
- Improved Handling & Stability
- Enhanced Safety
- Increased Comfort & Reduced Noise

## TECHNICAL SPECIFICATIONS

| Product Category  | Properties          | Standard Applied                          | Unit                | Specifica-          |
|-------------------|---------------------|---|---------------------|---------------------|
| Bushing           | Tensile Strength    | ASTM D412                                 | Kgf/cm <sup>2</sup> | Min 130             |
| Strut Mount       | Elongation at Break | ASTM D412                                 | %                   | Min 300%            |
| Rubber Dust Cover | Ash Content         | ASTM D395                                 | %                   | <10%                |
| Engine Mount      | Compression Set     | ASTM D395                                 | 70° C for 24 Hours  | <35                 |
|                   | Ozone Test          | Ozone Concentration 50+/- pphm Strain 20% | 70 hrs @ 40° +/- 2C | No cracks permitted |
| TPE Dust Cover    | Tensile Strength    | ASTM D412                                 | 7.8 Mpa             | Min 6.9             |
|                   | Elongation at Break | ASTM D412                                 | %                   | Min 340%            |

# SUSPENSION PRODUCTS AVAILABLE



STRUT MOUNT



STRUT KIT



BUSHINGS



ENGINE MOUNTS



BELLOWS